

TOTALSEAL™ TS FLUORON



DESCRIPTION 100% pure expanded PTFE one side self-adhesive

FEATURES *TS FLUORON* is inert and resistant to chemicals and corrosive environments (pH 0 to 14)

Range Temperature: - 240° to +260° C

Max pressure: 240 bar (depending from temperature and application)


SERVICE

Hydraulic, pneumatic and water supply systems; steam vessel, pressure vessel and pipe flanges; fan housings, ventilation and fume ducts; pump and compressor housing flanges heat exchangers, condensers, turbine and engine case doors; fuel injector gaskets, man way flanges, manhole covers, concrete lids, cofferdam lids, porthole gaskets; joints in glass, ceramic, plastic and reinforced plastic. Suitable for use in the following industries: food and drink, pharmaceutical, water and gas supply, petroleum, chemical, building, agricultural, automotive, marine and power.

Simple to use, soft and flexible - easily follows irregular contours; self-adhesive strip allows accurate positioning, just cut to length, press into position and form into closed envelope by overlapping the two ends. Low bolting torques.

DIMENSIONS

Width (mm)	3	5	7	10	12,5	14	19	20
Thickness (mm)	1,5	2	2,5	3	4	5	6	7
Length (m)	50	50	50	25	25	25	20	15

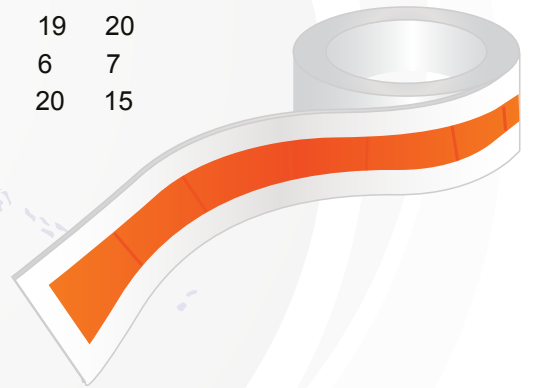

W.A. Office:

16 Irwin Street, Bellevue 6056
Tel: + 61 8 9374 0355 | Fax: + 61 8 9374 0366
sales@wcis.com.au

QLD Office:

2/17 Blue Eagle Drive, Meadowbrook 4131
Tel: + 61 7 3200 9211 | Fax: + 61 7 3200 3453
gasketsales@wcis.com.au